


Product Overview

This bend provides a 90° change of direction when connecting straight cable tray sections, maintaining continuous cable support and routing through the turn.

- Extruded aluminum alloy 6063 construction
- Ladder-style design with two side rails
- 1.13" wide tubular rungs, arc-welded on both sides
- Class 3 fitting with 2.375" flanges
- 3" flat side rail tangents beyond the curvature
- Each section includes splice plates and fastening hardware
- Splice resistance less than 0.00033 ohms
- UL Classified as an equipment grounding conductor per NEC 392
- Compliant with NEMA VE1, CSA C22.2 No. 126, and NEC Article 392
- Matching covers listed below



Additional Images

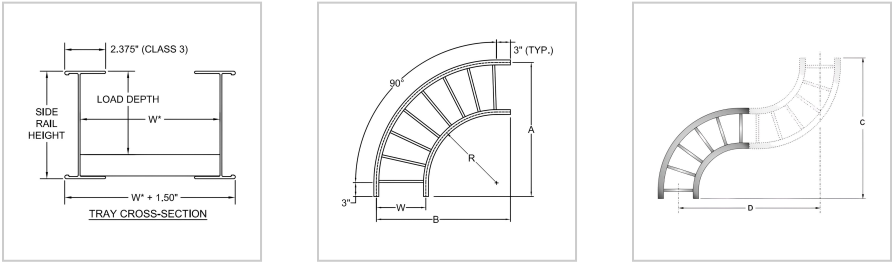

Product Family

SKU	Width (W)	Type	Pairs With	Bend Radius (R)	Footprint (AxB)	Offset (CxD)	Weight
LT-C90-06-4D	6"	Tray	LT-V90-06-A	12" at 90°	21" x 21"	36" x 36"	4.00
LT-C90-09-4D	9"	Tray	LT-V90-09-A	12" at 90°	24" x 24"	39" x 39"	5.00
LT-C90-12-4D	12"	Tray	LT-V90-12-A	12" at 90°	27" x 27"	42" x 42"	6.00
LT-C90-18-4D	18"	Tray	LT-C90-18-4D	12" at 90°	33" x 33"	48" x 48"	7.00
LT-C90-24-4D	24"	Tray	LT-V90-24-A	12" at 90°	39" x 39"	54" x 54"	8.35
LT-V90-06-A	6"	Cover	LT-C90-06-4D	-	-	-	1.50
LT-V90-09-A	9"	Cover	LT-C90-09-4D	-	-	-	2.00
LT-V90-12-A	12"	Cover	LT-C90-12-4D	-	-	-	2.60
LT-V90-18-A	18"	Cover	LT-C90-18-4D	-	-	-	3.95
LT-V90-24-A	24"	Cover	LT-C90-24-4D	-	-	-	5.75