
PARTS LIST								
ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.		
1	3	SLPR12	PVC ROOFTOP SLEEPER	43 3/8 in	4.13	12.38		
2	6	RCCLIP2	ROOFTOP COVER CLIP LONG		0.62	3.74		
3	1	X-SP1543D	DUAL STACK ROOFTOP COVER 8 X 2		99.41	99.41		
4	18	G38114	3/8" x 1-1/4" HDG HEX BOLT GR5		0.06	1.13		
5	30	G38FW	3/8" HDG USS FLATWASHER		0.01	0.35		
6	18	G38LW	3/8" HDG LOCKWASHER		0.01	0.12		
7	18	G38NUT	3/8" HDG HEAVY 2H HEX NUT		0.03	0.61		
8	6	RN38	RETAINING NUT 3/8" X 1-1/4"		0.04	0.24		
9	6	SS38114	SS 3/8" X 1-1/4" BOLT	1 1/4 in	0.06	0.36		
10	1	X-SP1542D	DUAL STACK ROOFTOP COVER 4 X 2		71.29	71.29		
11	6	SS38FW	3/8" STAINLESS FLATWASHER		0.01	0.05		
						189 68		

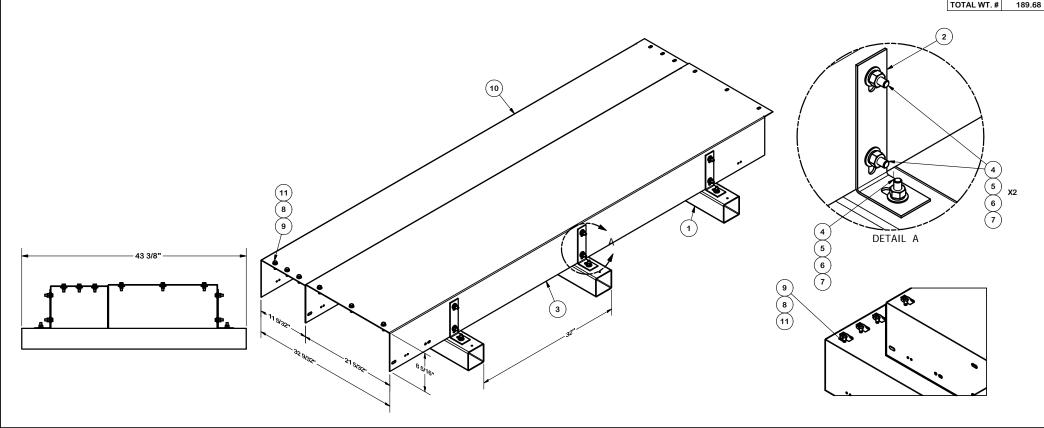

## **TOLERANCE NOTES**

TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (\$ 0,030") DRILLED AND GAS CUT HOLES (\$ 0,030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (\$ 0,010") - NO CONING OF HOLES

BENDS ARE ± 1/2 DEGREE

ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")

PROPRIETARY NOTE:
THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT
INDUSTRIES AND CONSIDERED A TRACE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF
VALMONT INDUSTRIES IS STRICTLY PROHIBITED.

## DESCRIPTION

TALL ROOFTOP COAX KITS FOR 12 RUNS OF COAX



Engineering Atlanta, GA
Support Team: Locations:
New York, NY
Atlanta, GA
1-888-753-7446
Plymouth, IN
Salem, OR
Dallas, TX

CPD NO.		0.	DRAWN BY	ENG. APPROVAL	PART NO.	١,	
			CEK 8/30/2011		SP1595D	0	
	CLASS	SUB	DRAWING USAGE	CHECKED BY	DWG. NO.	η.	
	81	01	CUSTOMER	BMC 9/2/2011	SP1595D	_	