



CR-1x-x: Cable Runway

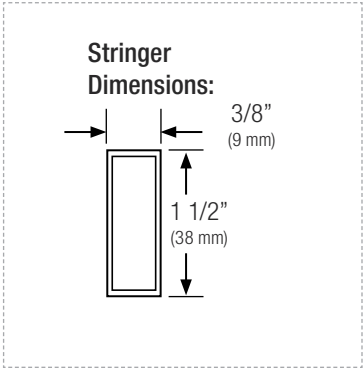

A valmont COMPANY

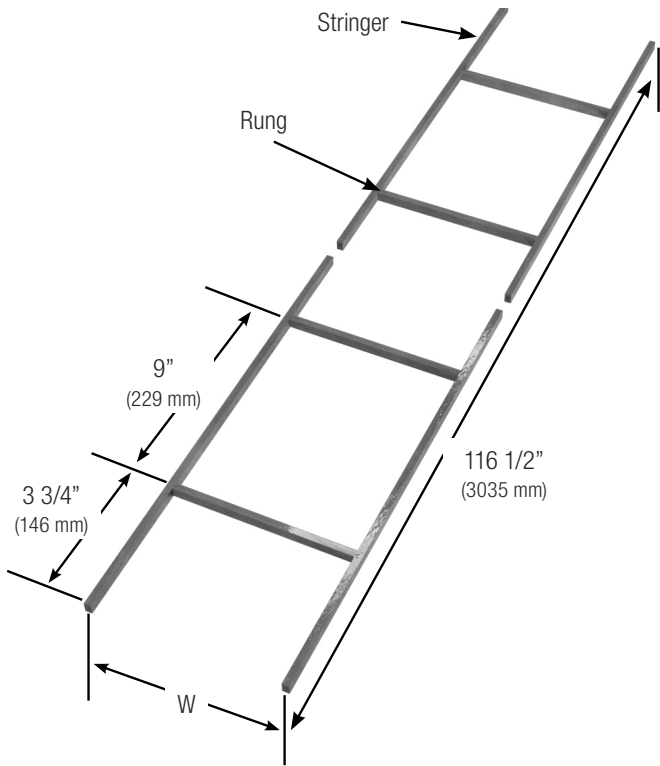

Features:

- 3/8" x 1-1/2" tubular steel stringers
- 1/2" x 1" steel channel welded rungs on 9" centers
- UL Classified as suitable as an equipment grounding conductor

Construction:

- ASTM A513 Grade 1008 steel tube
- Telco gray powder coat or yellow zinc finish

Related Products:

- Cable Runway Accessories

Part #	Size	Finish
CR-12-Y	12" x 10'	Yellow Zinc
CR-12-G	12" x 10'	Telco Gray
CR-18-Y	18" x 10'	Yellow Zinc
CR-18-G	18" x 10'	Telco Gray

Span ft (m)	Recommended Load lb/ft (N/m)	Max. Load @ 5/8" Deflection lb/ft (N/m)	Deflection Multiplier
4 (1.22)	149 (2174)	347 (5062)	0.0018
5 (1.52)	95 (1386)	145 (2115)	0.0043
6 (1.83)	66 (963)	70 (1021)	0.0089

UL Cross Sectional Area

0.40 in² (2.58 cm²)

Design Factors for (1) Rail

Area = 0.210 in² (1.35 cm²)

Sx = 0.066 in³ (1.08 cm³)

Ix = 0.050 in⁴ (2.08 cm⁴)

created on: 03/24/2021