

			PARTS LIST			
ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.
1	2	X-VXDW45	XTREME DUTY 45" VERTICAL SUPPORT ARM		100.07	200.13
2	1	BCAM-HD	HEAVY DUTY BOLT CALIBRATED ANGLE MAINSTAY		147.01	147.01
3	1	SPTB	SLIDING TIE-BACK ASSEMBLY KIT		93.55	93.55
4	2	P30156	2-7/8" O.D. x 156" SCH. 40 PIPE	156 in	80.01	160.03
5	1	VFAPL4-K	HD FRAME PIVOT PLATE KIT		39.25	39.25
6	8	SCX2-K	CROSSOVER PLATE KIT		8.84	70.73
7	1	VFAHD-FACEHW	HARDWARE KIT FOR VFA SECTOR FRAME		17.93	17.93
		<u>.</u>	·		TOTAL WT. #	728.64



TOLERANCE NOTES	DESC	CRIPTIO	N			_
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES ($\pm 0.030^{"}$) DRILLED AND GAS CUT HOLES ($\pm 0.030^{"}$) - NO CONING OF HOLES LASER CUT EDGES AND HOLES ($\pm 0.010^{"}$) - NO CONING OF HOLES BENDS AND ANGLES ARE $\pm 1/2$ DEGREE ALL OTHER MACHINING ($\pm 0.030^{"}$) ALL OTHER ASSEMBLY ($\pm 0.060^{"}$)	12')	(TRE		V-FRAME AS ARMS 5' STA		V
	CPD N	0.	DRAWN B	Y	ENG. APPR	0\
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	SF	י1	KS	10/7/2024		2
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS	sub 02		USAGE STOMER	CHECKED I	вү 2

9/16" SLOTTED HOLE FOR EQUIPMENT PIPE HARDWARE

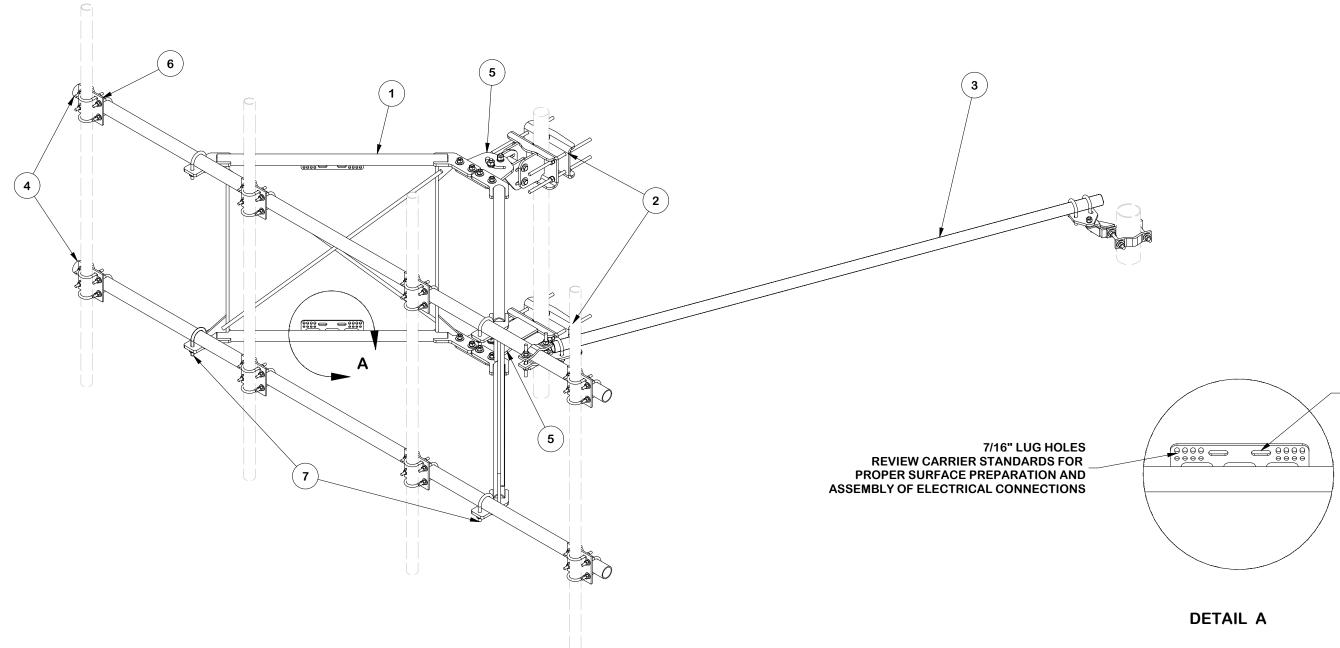


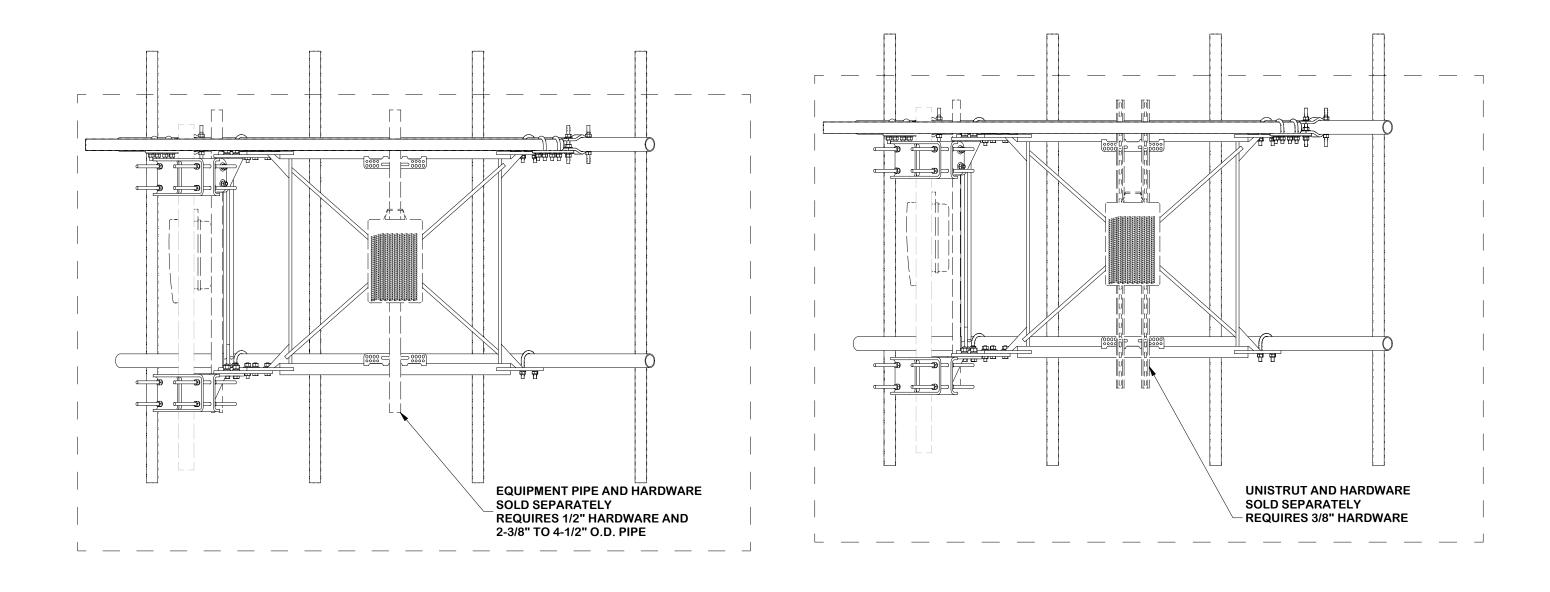


V-BOOM ARM RRU MOUNTING UNISTRUT OR PIPE

TOLERANCE NOTES	DES	CRIPTIC	N				
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	12'	XTREI		Y V-FRAME AS ARMS 5' STA			
	CPDN	10.	DRAWN E	BY	ENG. APP	PROVA	
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS			KS	10/7/2024		2/	
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS	s sub 02		B USAGE STOMER	CHECKE	о вү 2/	



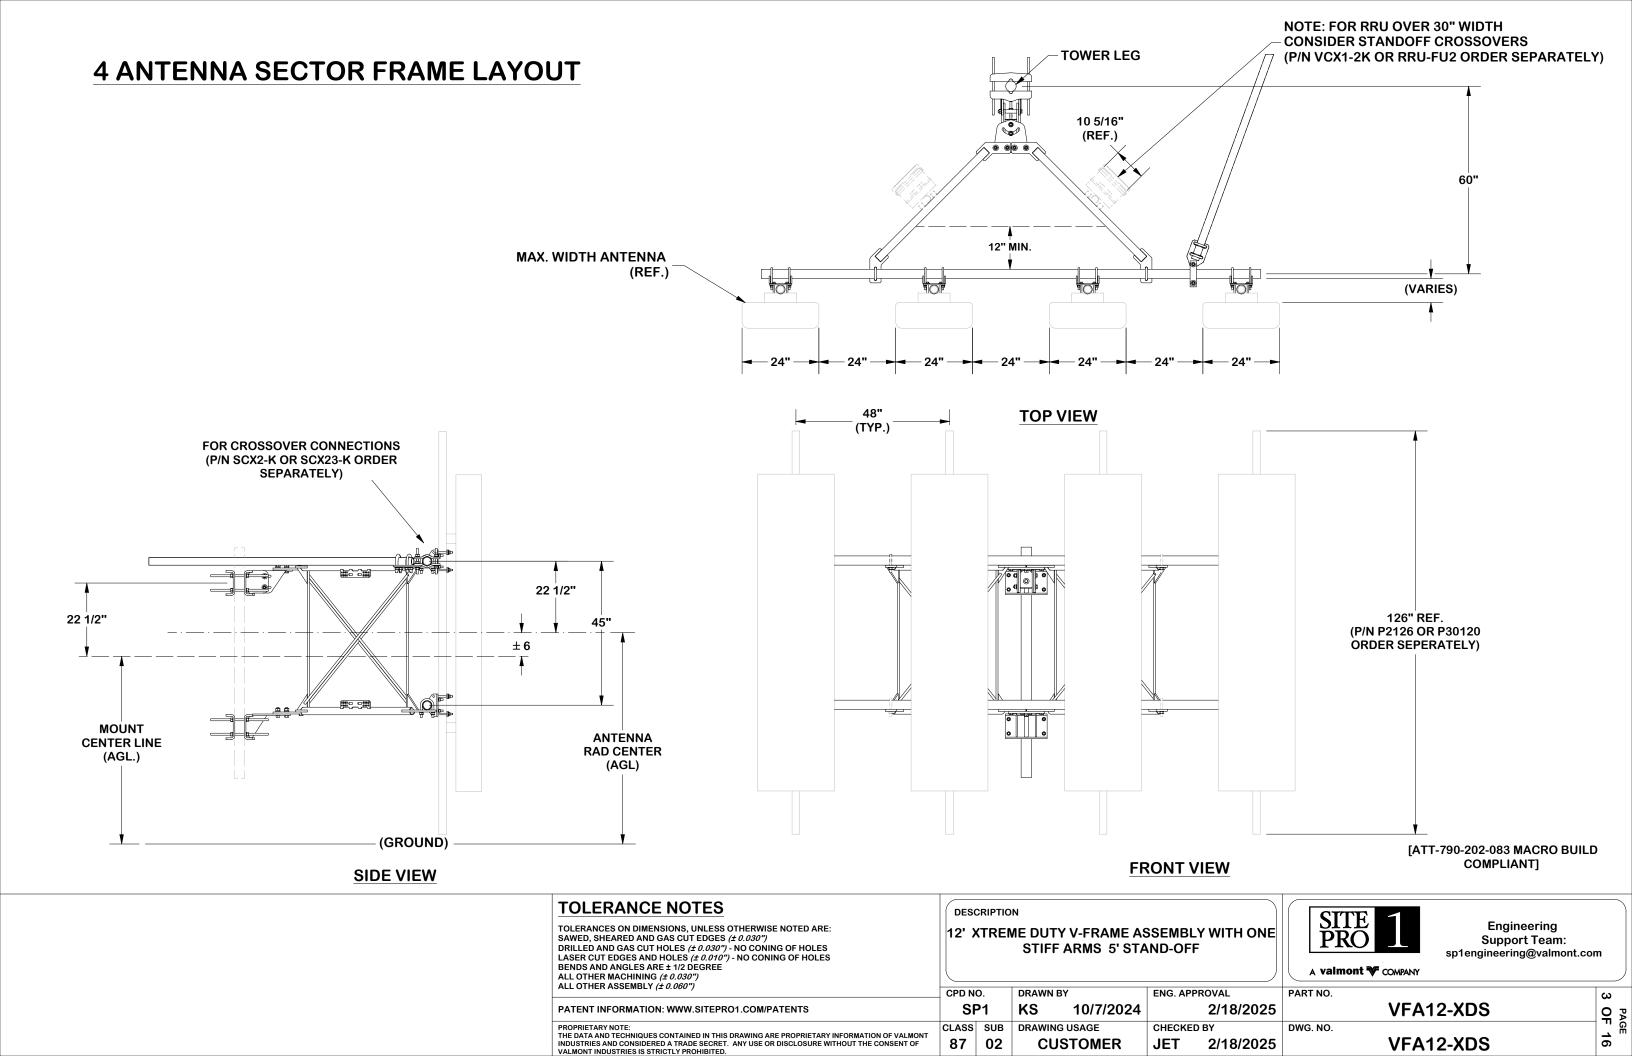

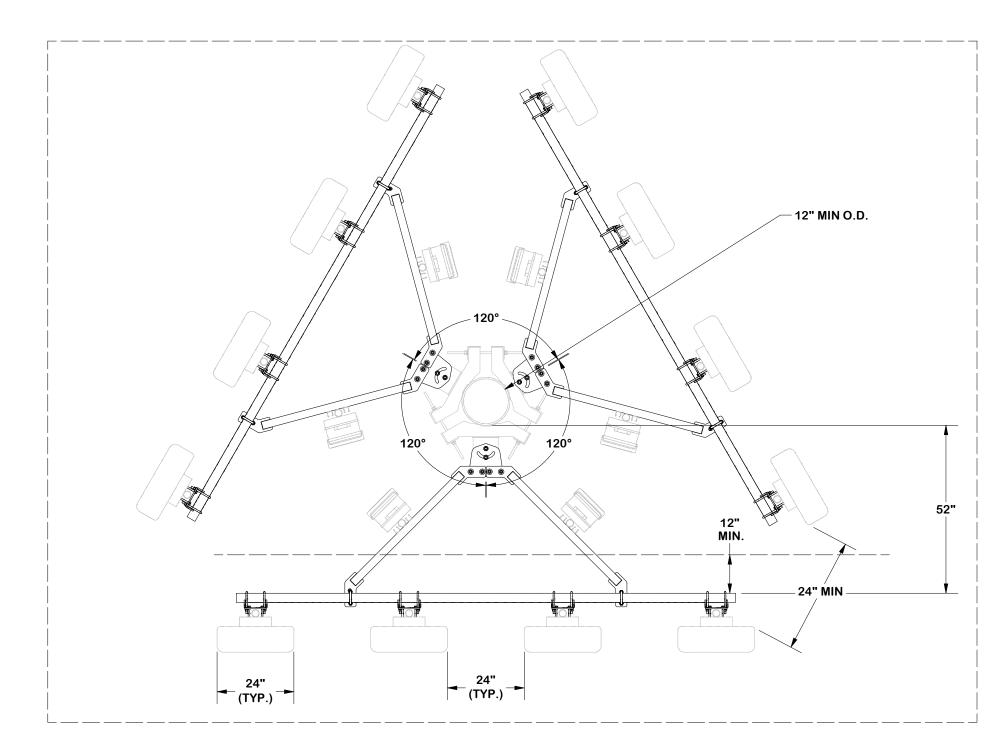


NOTE: TIEBACKS OMITTED FOR CLARITY

						1	
TOLERANCE NOTES	DESC	CRIPTIO	N				
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030")		TRE	ME DUTY V-FRAME A STIFF ARMS 5' STA		SILE Engineering Support Team: Support Team: A valmont ♥ COMPANY Support Team:	om	
ALL OTHER ASSEMBLY (± 0.060")	CPD N	0.	DRAWN BY	ENG. APPROVAL		PART NO.	4
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	SF	י1	KS 10/7/2024		2/18/2025	3 Sided Pole Representation	OF PA
PROPRIETARY NOTE:	CLASS	SUB	DRAWING USAGE	CHECKED) BY	DWG. NO.	
THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	87	02	CUSTOMER	JET	2/18/2025	VFA12-XDS	16

[ATT-790-202-083 MACRO BUILD COMPLIANT]


			PARTS LIST			
ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.
1	1	X-HDCAMTBW	CLAMP WELDMENT FOR BCAM-HD		33.86	33.86
2	1	X-MHTPHD	MULTI-HOLE TAPER PLATE WELDMENT		36.24	36.24
3	2	X-LCBP4	BENT BACKING PLATE	13 in	20.04	40.09
4	1	X-HDCAMSS	ANGLE ADJUSTMENT WELDMENT FOR BCAM-HD		16.39	16.39
5	1	X-HDCAMSP	POSITIONING PLATE WELDMENT FOR BCAM-HD		2.58	2.58
6	8	G58R-18	5/8" x 18" THREADED ROD (HDG.)		1.57	12.54
7	2	G5807	5/8" x 7" HDG HEX BOLT GR5 FULL THREAD	7 in	0.70	1.41
8	1	G5806	5/8" x 6" HDG HEX BOLT GR5 FULL THREAD	6 in	0.62	0.62
9	5	G58FW	5/8" HDG USS FLATWASHER	1/8 in	0.07	0.35
10	18	G58LW	5/8" HDG LOCKWASHER		0.03	0.47
11	19	G58NUT	5/8" HDG HEAVY 2H HEX NUT		0.13	2.47
· · ·					TOTAL WT. #	147.02

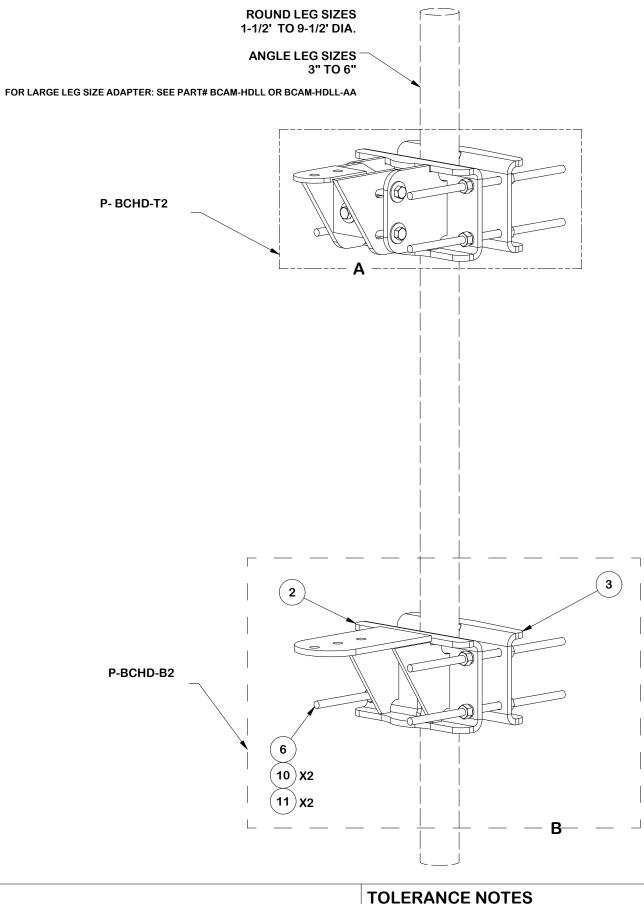

** FOR DETAIL SEE PAGE 2**

					TOLERANCE NOTES	DES	CRIPTIO)N	
					TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS ARE ± 1/2 DEGREE	12' >	KTRE	ME DUTY V-FRAME AS STIFF ARMS 5' STA	
					ALL OTHER MACHINING (± 0.030")	CPD N	0.	DRAWN BY	ENG. APPRO
		•			ALL OTHER ASSEMBLY $(\pm 0.060")$	SI	D1	KS 10/7/2024	
Α	REPLACED C CHANNEL BRKT WITH FORMED PLATE BRKT	SP1	KS	4/24/2018					
REV	DESCRIPTION OF REVISIONS	CPD	BY	DATE	PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT	CLASS	SUB	DRAWING USAGE	CHECKED B
	REVISION HISTORY	1		1	INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF	87	02	CUSTOMER	JET



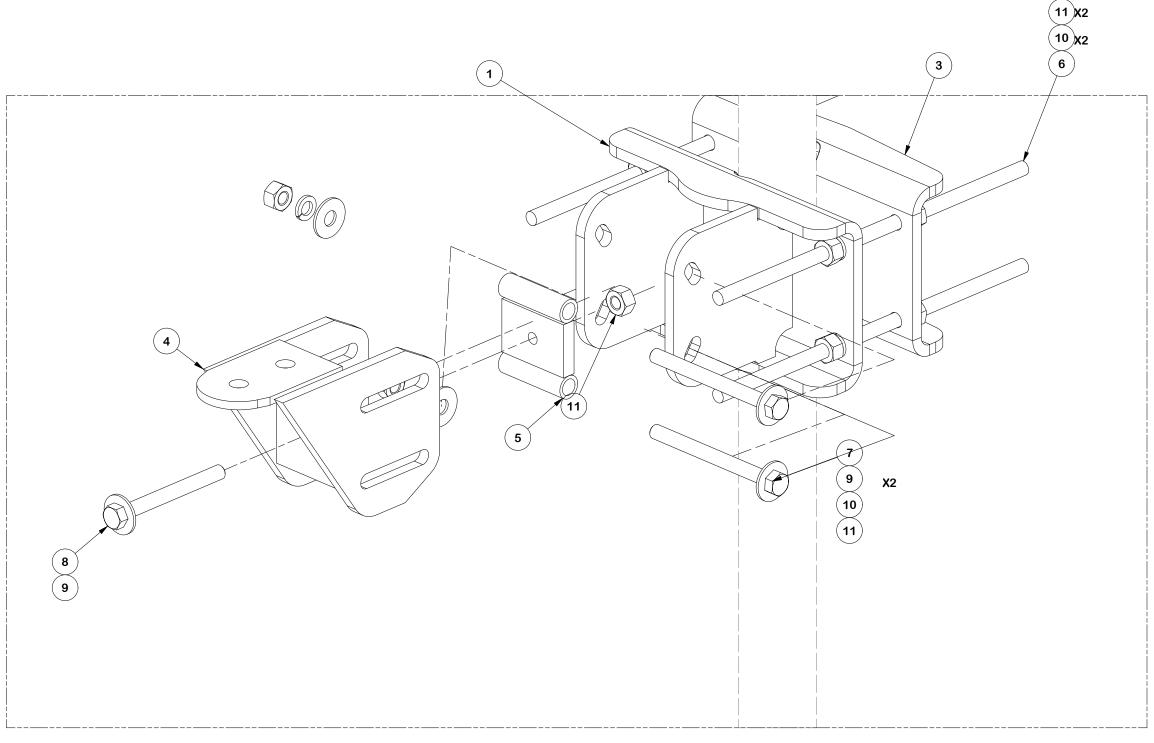


VIEW A

					TOLERANCE NOTES	DESC	CRIPTIO	N	
					TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS ARE ± 1/2 DEGREE	12' >	KTREN	ME DUTY V-FRAME AS STIFF ARMS 5' STA	
							0.	DRAWN BY	ENG. APPRO
					ALL OTHER ASSEMBLY (± 0.060")	SF	D1	KS 10/7/2024	
A REPLACED C CHANNEL BRKT WITH FORMED PLATE BRKT SP1 KS 4/24/201						CLASS			
REV DESCRIPTION OF REVISIONS CPD BY DATE				DATE	PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT			DRAWING USAGE	CHECKED BY
	REVISION HISTORY		INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	87	02	CUSTOMER	JET 2		




ANGLE CALIBRATING PROCEDURE:

- 1. MEASURE TOWER TAPER AND PICK LOWER BRACKET HOLE:
 - HOLE A = -2.6° TO 2.6°
 - HOLE B = 1.6° TO 6.8°
- 2. USE CALIBRATING BOLT TO ADJUST FRAME TO DESIRED TAPER
- 3. TORQUE LOCKING BOLTS TO 100 ft.-lbs.
- 4. ADVANCE LOCKING NUT TO POSITIONING PLATE, THEN TIGHTEN.

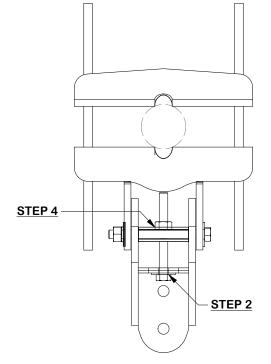


UPPER

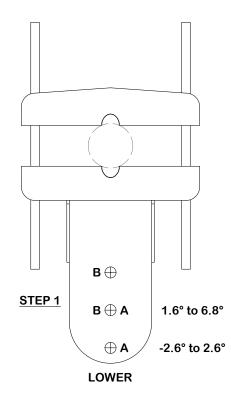

					TOLERANCE NOTES	DESC	CRIPTIO	N	
				TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS ARE ± 1/2 DEGREE	12' >	TREN	NE DUTY V-FRAME AS STIFF ARMS 5' STA		
					ALL OTHER MACHINING (± 0.030")	CPD N	0.	DRAWN BY	ENG. APPRC
		_			ALL OTHER ASSEMBLY (± 0.060")	SF	1 אי	KS 10/7/2024	
Α	REPLACED C CHANNEL BRKT WITH FORMED PLATE BRKT	SP1	KS	4/24/2018		CLASS			
REV DESCRIPTION OF REVISIONS CPD BY DATE					PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT			DRAWING USAGE	CHECKED B
REVISION HISTORY					INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	87	02	CUSTOMER	JET :

Y WITH ONE	STTE 11 Engineering Support Team: 1-888-753-7446 Locations: New York, N' Atlanta, GA A valmont ▼ COMPANY Engineering Support Team: 1-888-753-7446 New York, N' Atlanta, GA						
ROVAL	PART NO.			7			
2/18/2025	BCA	M-HD		<u>o</u>	PΑ		
BY	DWG. NO.				PAGE		
2/18/2025	VFA1	2-XDS		16			

			PARTS LIST			
ITEM	QTY	LENGTH	UNIT WT.	NET WT.		
1	1	P2126	2-3/8" X 126" (2" SCH. 40) GALVANIZED PIPE	126 in	40.75	40.75
2	1	SPTBU-F	UNIVERSAL SLIDING PIPE TIE BACK ASSEMBLY (FRONT CONNECTION ONLY)		19.26	19.26
3	1	SPTBU-B	UNIVERSAL SLIDING PIPE TIE BACK ASSEMBLY (BACK CONNECTION ONLY)		33.54	33.54
					TOTAL WT. #	93.55

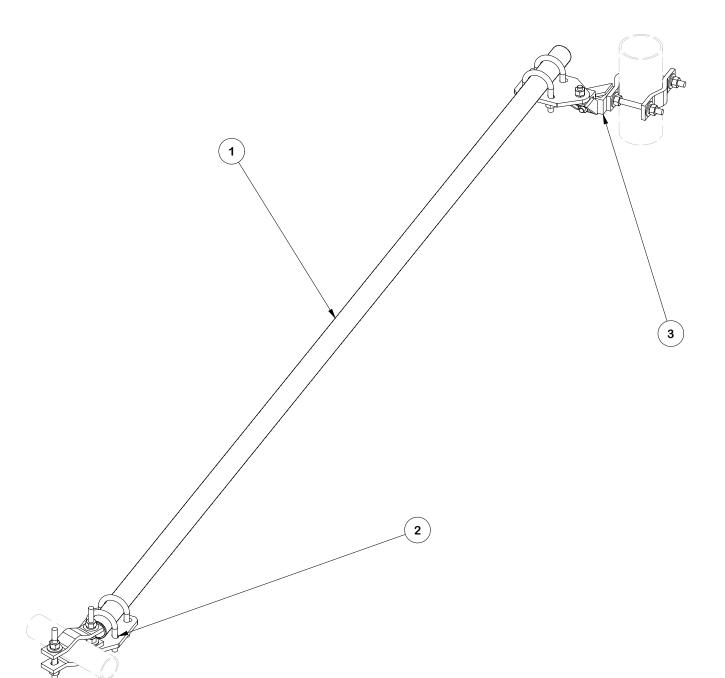


					TOLERANCE NOTES	DESCRIPTION						
					TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	12')		AE DUTY V-FRAME AS STIFF ARMS 5' STA	ND-OFF			
							0.	DRAWN BY	ENG. APPRC			
A REPLACED C CHANNEL BRKT WITH FORMED PLATE BRKT SP1 KS 4/24/20					PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	SF	P1	KS 10/7/2024	:			
REV	DESCRIPTION OF REVISIONS	DATE	PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT	CLASS	SUB	DRAWING USAGE	CHECKED B					
	REVISION HISTORY			INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	87	02	CUSTOMER	JET :				



RECOMMENDED VERTICAL ADJUSTMENT


RECOMMENDED HORIZONTAL ADJUSTMENT

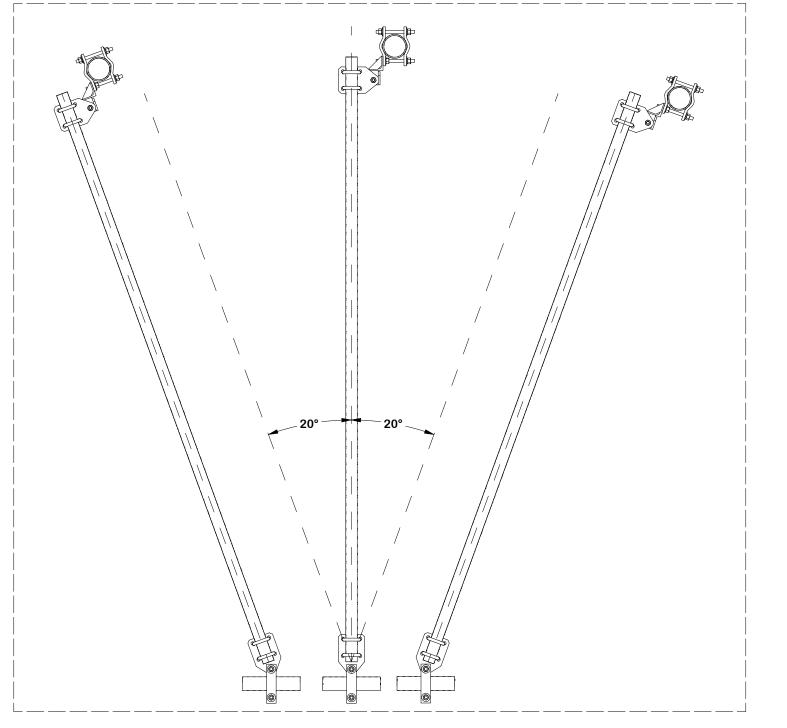


- 20 DEG. 0 DEG.

DEG. + 20 DEG.

TOLERANCE NOTES	DESC	CRIPTIC	N		
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	12' >	(TRE		Y V-FRAME AS ARMS 5' STA	
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS			DRAWN I	^{вү} 10/7/2024	ENG. API
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS 87	•	DRAWIN		снеске ЈЕТ

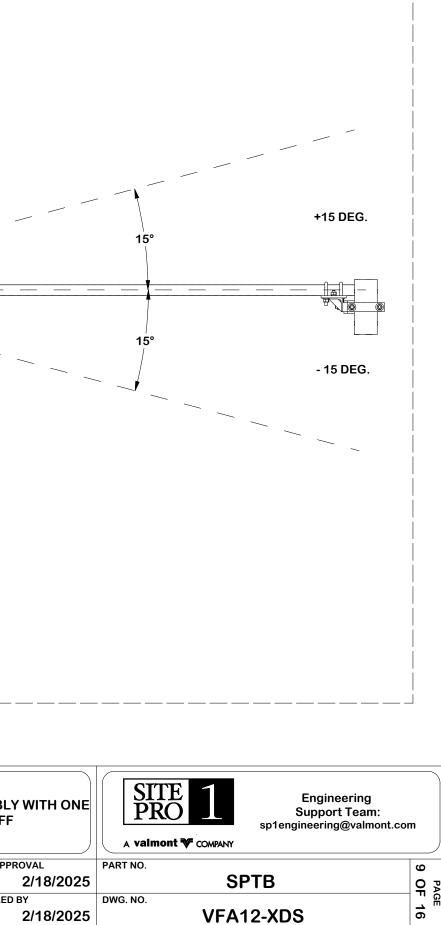



			PARTS LIST			
ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.
1	1	X-SPTB-U	SLIDING PIPE TIE BACK PLATE	5 1/2 in	5.58	5.58
2	2	DCP	1/2" THICK, 5-3/4" CNTER TO CENTER CLAMP HALF	8 1/8 in	2.36	4.72
3	2	X-UB5258	5/8 X 2-5/8" X 4-1/2" X 2" U-BOLT	4 1/2 in	1.06	2.12
4	2	X-UB5300	5/8" X 3" X 5-1/4" X 2-1/2" U-BOLT	5 1/4 in	1.22	2.43
5	2	G5804	5/8" x 4" HDG HEX BOLT GR5		0.44	0.89
6	2	G58R-8	5/8" X 8" THREADED ROD (HDG.)		0.74	1.48
7	9	G58LW	5/8" HDG LOCKWASHER		0.03	0.23
8	9	G58FW	5/8" HDG USS FLATWASHER	1/8 in	0.07	0.63
9	9	G58NUT	5/8" HDG HEAVY 2H HEX NUT		0.13	1.17
					TOTAL WT. #	19.26

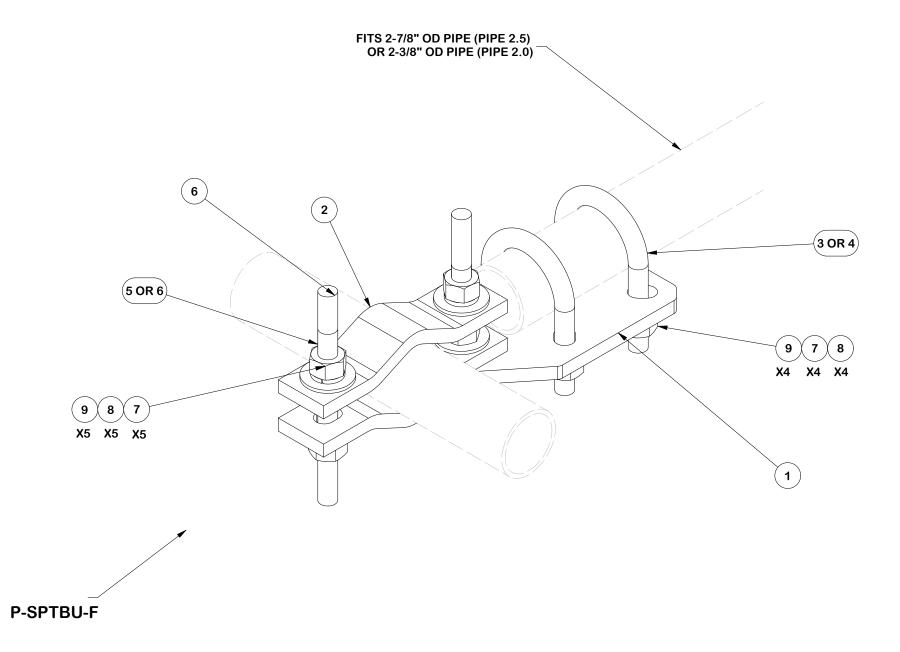

TOLERANCE NOTES	DESC	DESCRIPTION						
DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.030") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")		12' XTREME DUTY V-FRAME ASSEMBLY W STIFF ARMS 5' STAND-OFF						
	CPD N	0.	DRAWN E	SY	ENG. APPROV			
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	SF	י1	KS	10/7/2024		2/		
PROPRIETARY NOTE:	CLASS	SUB	DRAWING	S USAGE	CHECKE	DBY		
THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	87	02	CU	STOMER	JET	2/		



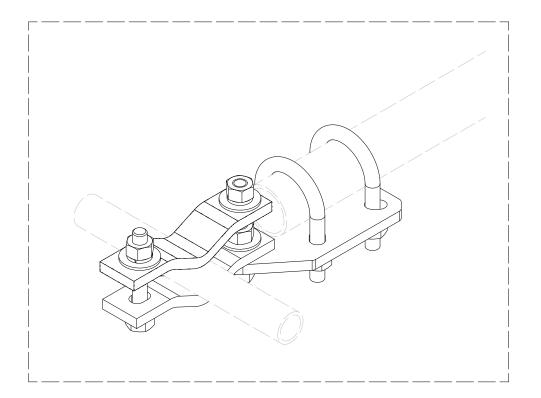


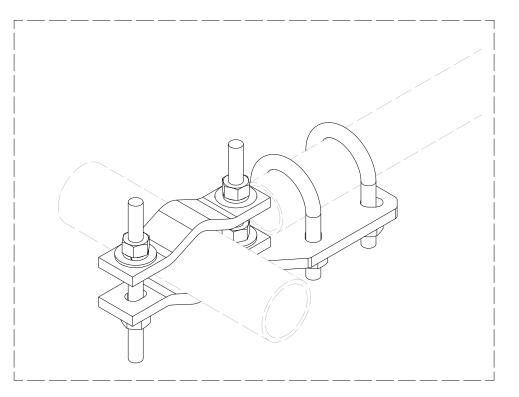


SMALL ATTACHMENT 1-1/2" TO 2-3/8" NOTE: FLIP HALF BACK CLAMP ATTACHMENT 2-3/8" TO 5" HORIZONTAL ORIENTATION

FRONT FACE CONFIGURATIONS


TOLERANCE NOTES	DES	DESCRIPTION						
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	12' 3	XTREI		Y V-FRAME AS FARMS 5' STA				
ALL OTHER ASSEMBLI (1 0.000)	CPD N	0.	DRAWN	BY	ENG. APP	ROV		
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	S	P1	KS	10/7/2024		2		
PROPRIETARY NOTE:	CLASS	SUB	DRAWIN	G USAGE	CHECKED	CHECKED BY		
THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUISTRIES IS STRICTLY PROHIBITED	87	02	CU	STOMER	JET	2		

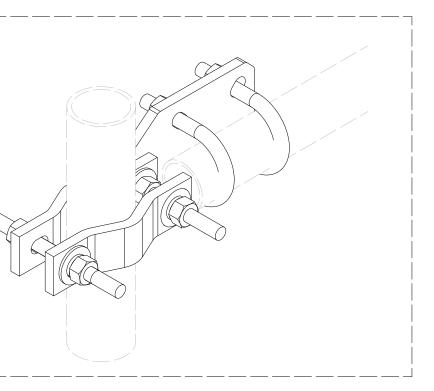

ATTACHMENT 2-3/8" TO 5" VERTICAL ORIENTATION

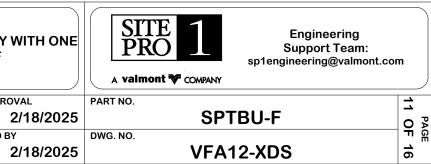

			PARTS LIST			
ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.
1	1	X-SPTB-U	SLIDING PIPE TIE BACK PLATE	5 1/2 in	5.58	5.58
2	2	X-TBCA	TIE BACK CLIP ANGLE		2.01	4.01
3	2	MCP	CLAMP HALF 1/2" THICK, 11-5/8" LONG	12 1/16 in	3.59	7.19
4	2	DCP	1/2" THICK, 5-3/4" CENTER TO CENTER CLAMP HALF	8 1/8 in	2.36	4.72
5	2	X-UB5258	5/8 X 2-5/8" X 4-1/2" X 2" U-BOLT	4 1/2 in	1.06	2.12
6	2	X-UB5300	5/8" X 3" X 5-1/4" X 2-1/2" U-BOLT	5 1/4 in	1.22	2.43
7	2	G5802	5/8" x 2" HDG HEX BOLT GR5		0.27	0.54
8	2	G5804	5/8" x 4" HDG HEX BOLT GR5		0.44	0.89
9	2	G58R-8	5/8" X 8" THREADED ROD (HDG.)		0.74	1.48
10	2	G58R-12	5/8" x 12" THREADED ROD (HDG.)		1.05	2.09
11	11	G58LW	5/8" HDG LOCKWASHER		0.03	0.29
12	11	G58FW	5/8" HDG USS FLATWASHER	1/8 in	0.07	0.78
13	11	G58NUT	5/8" HDG HEAVY 2H HEX NUT		0.13	1.43
					TOTAL WT. #	33.54

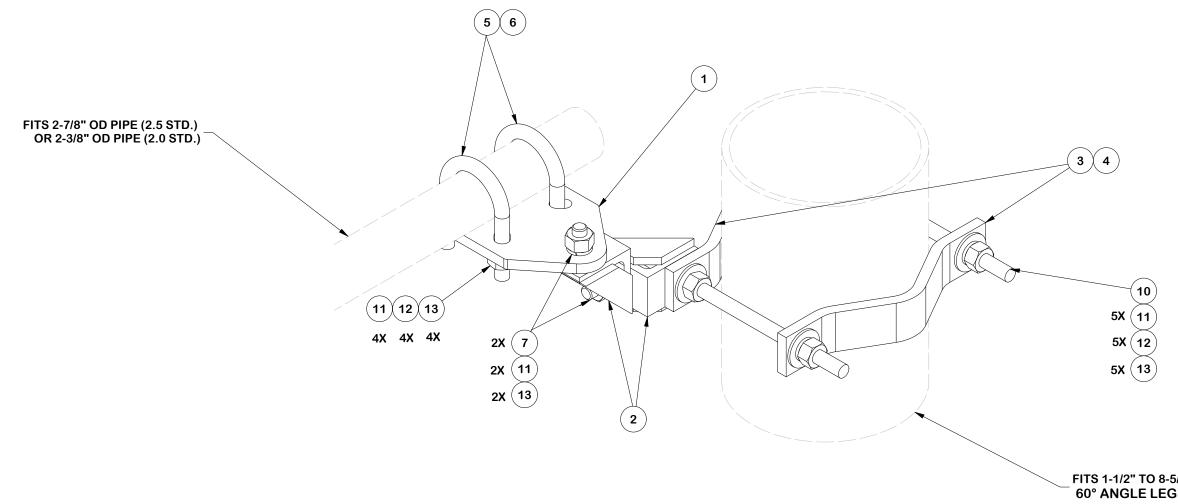


P-SPTBU-B


TOLERANCE NOTES	DESC	RIPTIO	N				
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES ($\pm 0.030^{\circ}$) DRILLED AND GAS CUT HOLES ($\pm 0.030^{\circ}$) - NO CONING OF HOLES LASER CUT EDGES AND HOLES ($\pm 0.010^{\circ}$) - NO CONING OF HOLES BENDS AND ANGLES ARE $\pm 1/2$ DEGREE ALL OTHER MACHINING ($\pm 0.030^{\circ}$) ALL OTHER ASSEMBLY ($\pm 0.060^{\circ}$)	12' XTREN		ME DUTY V-FRAME ASSEMBLY WIT STIFF ARMS 5' STAND-OFF				
ALE OTHER ASSEMBLT (20.000)		Э.	DRAWN B	SY	ENG. APF	PROVAL	
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	SF	י1	KS	10/7/2024		2/1	
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS	suв 02		SUSAGE STOMER	CHECKEI JET	о вү 2/1	

FITS 1-1/2" TO 8-5/8" OD TOWER LEGS 60° ANGLE LEGS UP TO 8", AND 90° ANGLE LEGS UP TO 6"


Y WITH ONE	SITE 1 Engineering Support Team: sp1engineering@valmont.com A valmont ♥ company Company	n				
ROVAL 2/18/2025		12				
2/10/2023	SPTBU-B					
BY	DWG. NO.		GE			
2/18/2025	VFA12-XDS					

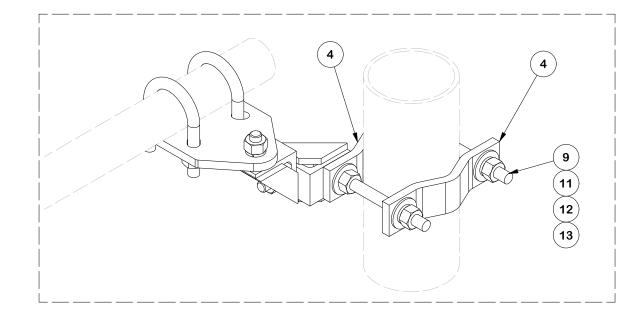



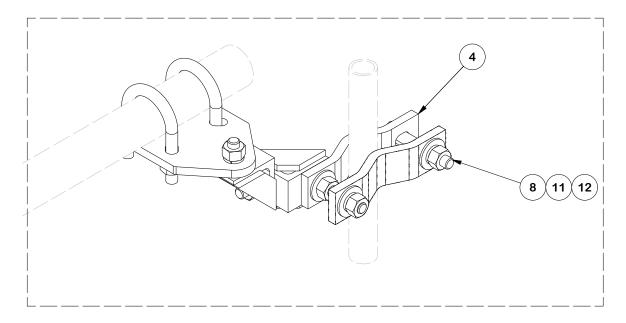

SMALL LEGS 1-1/2" TO 2-3/8" NOTE: FLIP HALF BACK CLAMP

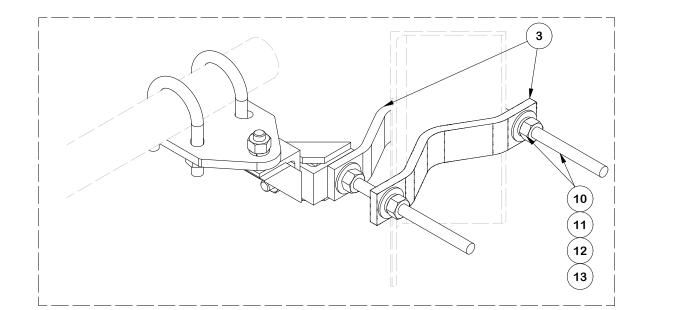


LARGE LEGS UP TO 6" 90 DEG. 8" 60 DEG NOTE: FLIP HALF BACK CLAMP

LARGE LEGS 5" TO 8-5/8" OD


TOWER LEG CONFIGURATIONS

TOLERANCE NOTES	DESC	RIPTIO	N			
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	12' እ	TREN	ME DUTY V-FRAME ASSEMBLY WI STIFF ARMS 5' STAND-OFF			
	CPD N	D .	DRAWN B	Y	ENG. APPI	ROVA
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	SF	י1	KS	10/7/2024		2/1
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS	suв 02		SUSAGE STOMER	CHECKED	^{вү} 2/1



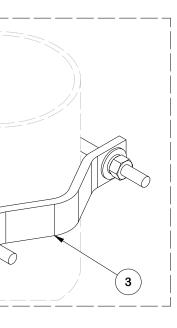



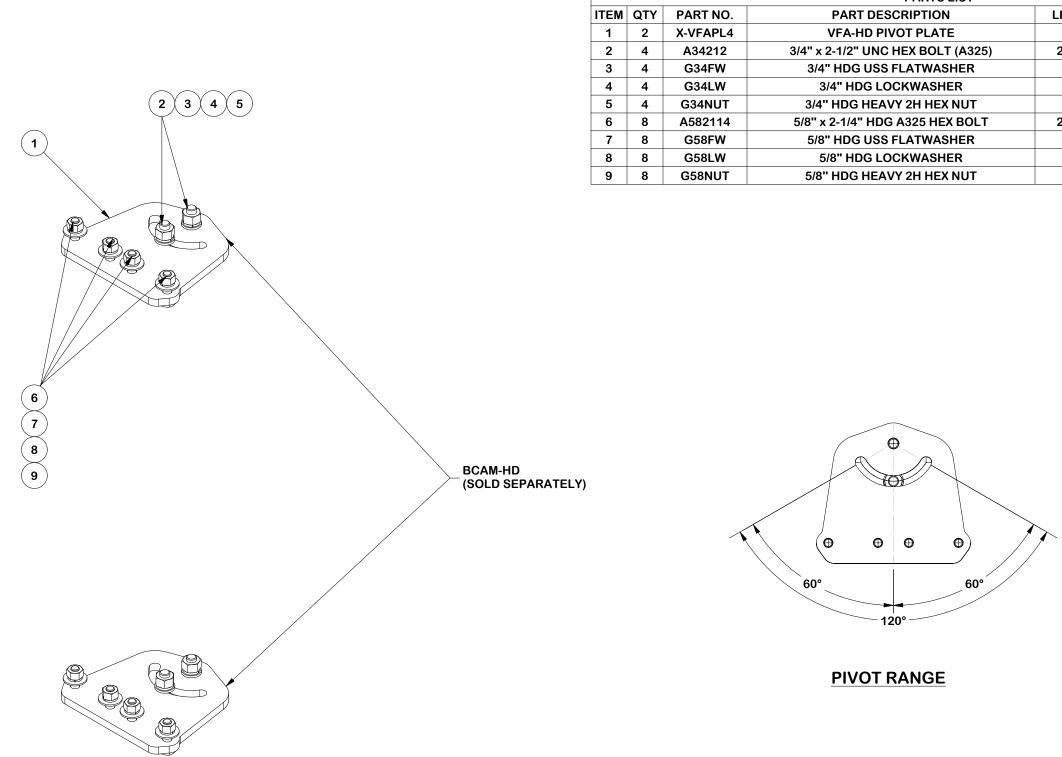


FINISH: HOT DIP GALVANIZED.

TOLERANCE NOTES	DESCRIPTION						
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")		12' XTREME DUTY V-FRAME ASSEMBLY W STIFF ARMS 5' STAND-OFF					
ALL OTHER ASSEMBLY (£ 0.060')	CPD N	10.	DRAWN	BY	ENG. APP	ROV	
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	S	SP1		10/7/2024		2	
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS	с во во во во во во во во во во во во во		g usage I STOMER	CHECKED	о вү 2	

PARTS LIST			
RT DESCRIPTION	LENGTH	UNIT WT.	NET WT.
-HD PIVOT PLATE	12 in	15.88	31.77
" UNC HEX BOLT (A325)	2 1/2 in	0.48	1.92
G USS FLATWASHER		0.06	0.24
IDG LOCKWASHER		0.04	0.17
G HEAVY 2H HEX NUT		0.21	0.85
4" HDG A325 HEX BOLT	2 1/4 in	0.31	2.50
G USS FLATWASHER	1/8 in	0.07	0.56
IDG LOCKWASHER		0.03	0.21
G HEAVY 2H HEX NUT		0.13	1.04
		TOTAL WT. #	39.25




			PARTS LIST			
ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.
1	1	SCX2	CROSSOVER PLATE	7 in	5.08	5.08
2	2	X-UB1300	1/2 X 3" X 5" X 2" U-BOLT	5 in	0.74	1.48
3	2	X-UB1212	1/2" X 2-1/2" X 4-1/2" X 2" U-BOLT	4 1/2 in	0.66	1.32
4	8	G12NUT	1/2" HDG HEAVY 2H HEX NUT	7/8 in	0.07	0.57
5	8	G12FW	1/2" HDG USS FLATWASHER	3/32 in	0.03	0.27
6	8	G12LW	1/2" HDG LOCKWASHER	1/8 in	0.01	0.11
				•	TOTAL WT. #	8.84

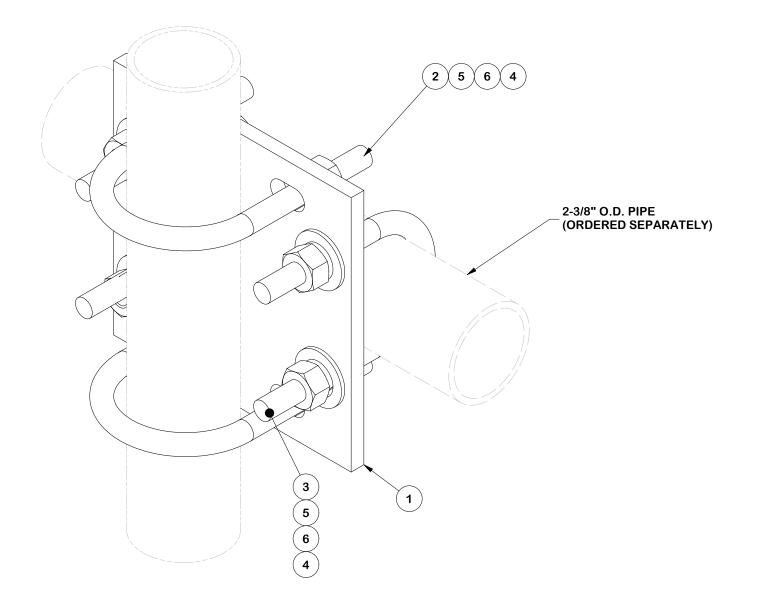

TOLERANCE NOTES	DESC	CRIPTIO	N					
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS ARE ± 1/2 DEGREE			12' XTREME DUTY V-FRAME ASSEMBLY STIFF ARMS 5' STAND-OFF					
ALL OTHER MACHINING (± 0.030")	CPD N	0.	DRAWN E	BY	ENG. APPRC			
ALL OTHER ASSEMBLY (± 0.060")	SF	P1	KS	10/7/2024				
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS	suв 02		B USAGE STOMER	CHECKED B			

Y WITH ONE	SITE 1 PRO 1	Engineering Support Team: 1-888-753-7446	Locations: New York, NY Atlanta, GA Los Angeles, CA Plymouth, IN Salem, OR Dallas, TX		
ROVAL	PART NO.			1 5	_
2/18/2025	SCX2-K				
BY	DWG. NO.			Ē	PAGE
2/18/2025	VFA1	2-XDS		16	

PARTS LIST										
QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.					
16	X-UB1300	1/2 X 3" X 5" X 2" U-BOLT	5 in	0.74	11.82					
4	X-UB5300	5/8" X 3" X 5-1/4" X 2-1/2" U-BOLT	5 1/4 in	1.22	4.87					
8	G58LW	5/8" HDG LOCKWASHER		0.03	0.21					
8	G58NUT	5/8" HDG HEAVY 2H HEX NUT		0.13	1.04					
				TOTAL WT. #	17.93					
	16 4 8	16 X-UB1300 4 X-UB5300 8 G58LW	QTY PART NO. PART DESCRIPTION 16 X-UB1300 1/2 X 3" X 5" X 2" U-BOLT 4 X-UB5300 5/8" X 3" X 5-1/4" X 2-1/2" U-BOLT 8 G58LW 5/8" HDG LOCKWASHER	QTY PART NO. PART DESCRIPTION LENGTH 16 X-UB1300 1/2 X 3" X 5" X 2" U-BOLT 5 in 4 X-UB5300 5/8" X 3" X 5-1/4" X 2-1/2" U-BOLT 5 1/4 in 8 G58LW 5/8" HDG LOCKWASHER 5 1/4 in	QTY PART NO. PART DESCRIPTION LENGTH UNIT WT. 16 X-UB1300 1/2 X 3" X 5" X 2" U-BOLT 5 in 0.74 4 X-UB5300 5/8" X 3" X 5-1/4" X 2-1/2" U-BOLT 5 1/4 in 1.22 8 G58LW 5/8" HDG LOCKWASHER 0.03 8 G58NUT 5/8" HDG HEAVY 2H HEX NUT 0.13					

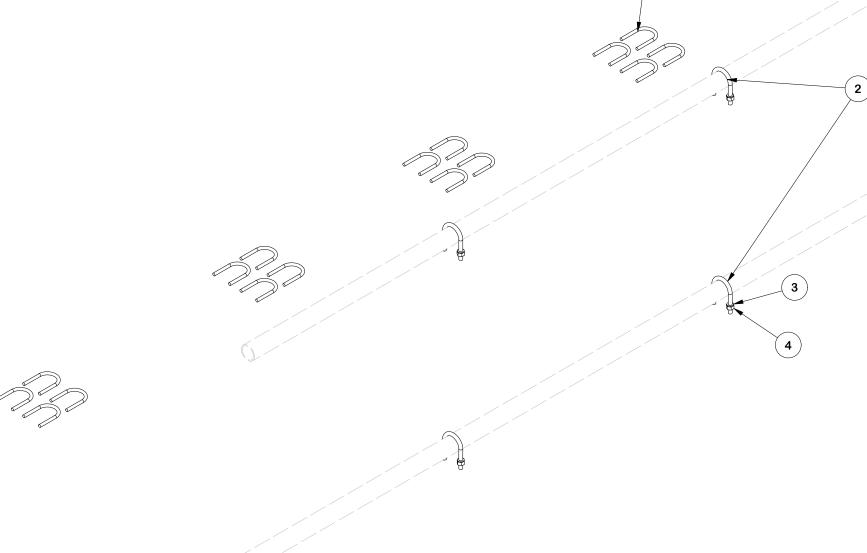

TOLERANCE NOTES	DES	DESCRIPTION				
TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")		12' XTREME DUTY V-FRAME ASSEMBLY STIFF ARMS 5' STAND-OFF				
	CPD NO.		DRAWN BY		ENG. APPR	
PATENT INFORMATION: WWW.SITEPRO1.COM/PATENTS	SP1		KS	10/7/2024		
PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	CLASS	suв 02		g usage ISTOMER	CHECKED I	

1

