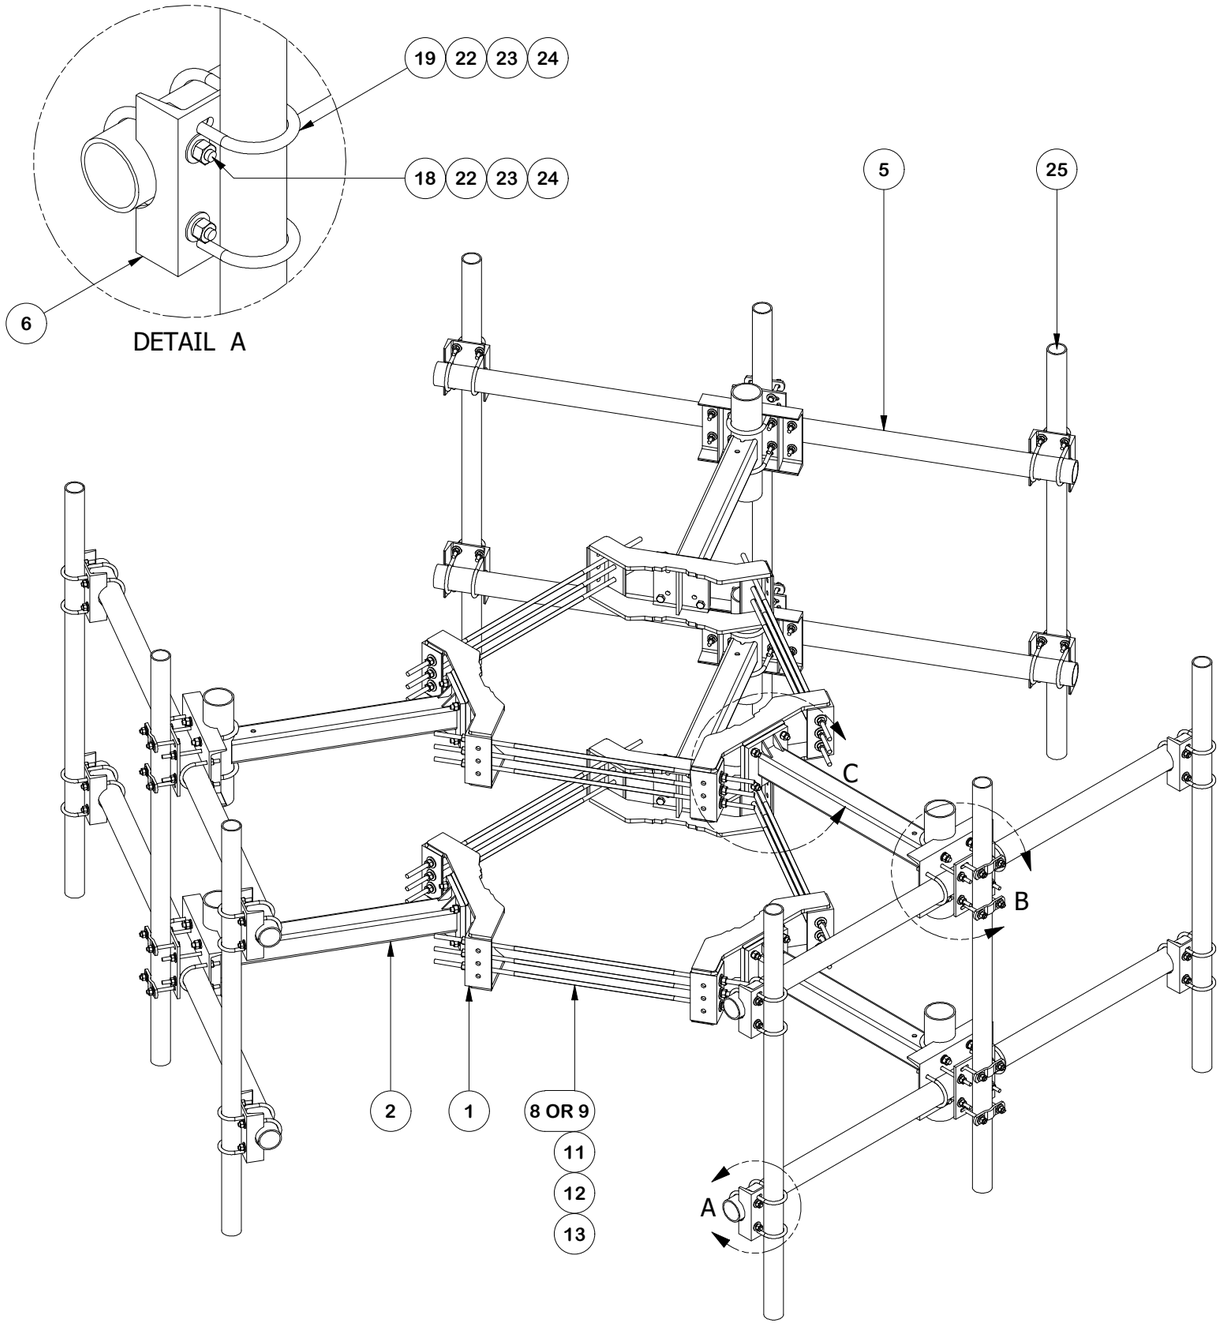
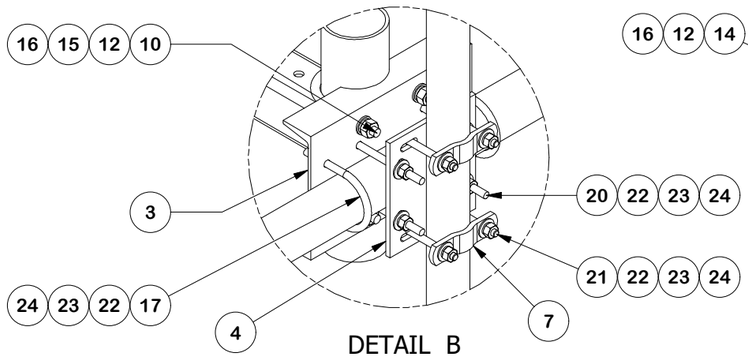


PARTS LIST						
ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.
1	6	X-LWRM	RING MOUNT WELDMENT		68.81	412.85
2	6	X-SV197-36	SUPPORT ARM WELDMENT - 36"		67.93	407.60
3	6	X-SP216	LARGE SUPPORT CROSS PLATE		22.08	132.46
4	6	SCX3	CROSSOVER PLATE	9.250 in	7.19	43.13
5	6	P396	3-1/2" X 96" (3" SCH 40) GALVANIZED PIPE (Fy = 35 ksi min.)	96.000 in	60.75	364.49
6	12	X-SP219	SMALL SUPPORT CROSS PLATE	8.250 in	8.61	103.33
7	12	X-100064	CLAMP (4" V-CLAMP) GALVANIZED		0.92	11.06
8	18	G58R-24	5/8" x 24" THREADED ROD (HDG.)		2.09	37.63
9	18	G58R-48	5/8" X 48" GALV THREADED ROD		4.39	79.03
10	12	X-UB5458	5/8" X 4-5/8" X 7" X 3" U-BOLT (HDG.)		1.54	18.42
11	36	G58FW	5/8" HDG USS FLATWASHER	.122	0.07	2.54
12	84	G58LW	5/8" HDG LOCKWASHER		0.03	2.19
13	36	G58NUT	5/8" HDG HEAVY 2H HEX NUT		0.13	4.68
14	24	A58234	5/8" x 2-3/4" HDG A325 HEX BOLT	2.75	0.36	8.54
15	24	A58FW	5/8" HDG A325 FLATWASHER		0.03	0.82
16	48	A58NUT	5/8" HDG A325 HEX NUT		0.13	6.23
17	12	X-UB1358	1/2" X 3-5/8" X 5-1/2" X 3" U-BOLT (HDG.)		0.77	9.27
18	24	X-UB1306	1/2" X 3-5/8" X 6" X 3" U-BOLT (HDG.)		0.83	19.88
19	24	X-UB1300	1/2" X 3" X 5" X 2" U-BOLT (HDG.)		0.70	16.72
20	24	G12R-8	1/2" x 8" THREADED ROD (HDG.)		0.45	10.71
21	24	G12045	1/2" x 4.5" HDG HEX BOLT GR5 FULL THREAD	4.5	0.30	7.15
22	216	G12FW	1/2" HDG USS FLATWASHER	0.095	0.03	7.36
23	192	G12LW	1/2" HDG LOCKWASHER	.125	0.01	2.67
24	192	G12NUT	1/2" HDG HEAVY 2H HEX NUT		0.07	13.75
25	9	A	B	C	D	TABLE



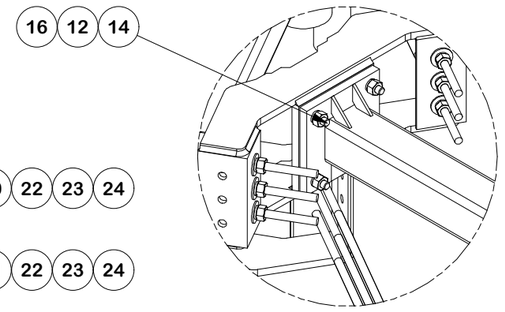


TABLE					
"ASSEMBLY NO."	PART NO. "A"	PART DESCRIPTION "B"	LENGTH "C"	UNIT WT. "D"	TOTAL WT.
RMVD8-3-3072	P3072	2-7/8" O.D. SCH. 40 PIPE	72"	36.93	2,054.89
RMVD8-3-3084	P3084	2-7/8" O.D. SCH. 40 PIPE	84"	43.08	2,110.24
RMVD8-3-3096	P3096	2-7/8" O.D. SCH. 40 PIPE	96"	49.24	2,165.68
RMVD8-3-30120	P30120	2-7/8" O.D. SCH. 40 PIPE	120"	61.55	2,276.47

REVISION HISTORY				
REV	DESCRIPTION OF REVISIONS	CPD	BY	DATE
A	CHANGED CENTER X-UB1300 TO X-100064	N/A	CSL	8/30/2023

TOLERANCE NOTES


TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE:
SAWED, SHEARED AND GAS CUT EDGES *(± 0.030")*
DRILLED AND GAS CUT HOLES *(± 0.030")* - NO CONING OF HOLES
LASER CUT EDGES AND HOLES *(± 0.010")* - NO CONING OF HOLES
BENDS ARE ± 1/2 DEGREE
ALL OTHER MACHINING *(± 0.030")*
ALL OTHER ASSEMBLY *(± 0.060")*


PROPRIETARY NOTE:
THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.

DESCRIPTION
8' DOUBLE MONOPOLE
TRIPLE T-ARM 12"-45"
W/ 2-7/8" ANTENNA PIPES

SITE PRO 1
A valmont COMPANY
Engineering Support Team: 1-888-753-7446
Locations:
New York, NY
Atlanta, GA
Los Angeles, CA
Plymouth, IN
Salem, OR
Dallas, TX

CPD NO.	DRAWN BY	ENG. APPROVAL	PART NO.	
NCS	CMFL 10/26/2020	4/10/2024	RMVD8-3-3XX	PAGE 1 OF 2
CLASS / SUB: 87 / 02	DRAWING USAGE: CUSTOMER	CHECKED BY: CSL 4/10/2024	DWG. NO. RMVD8-3-3XX	

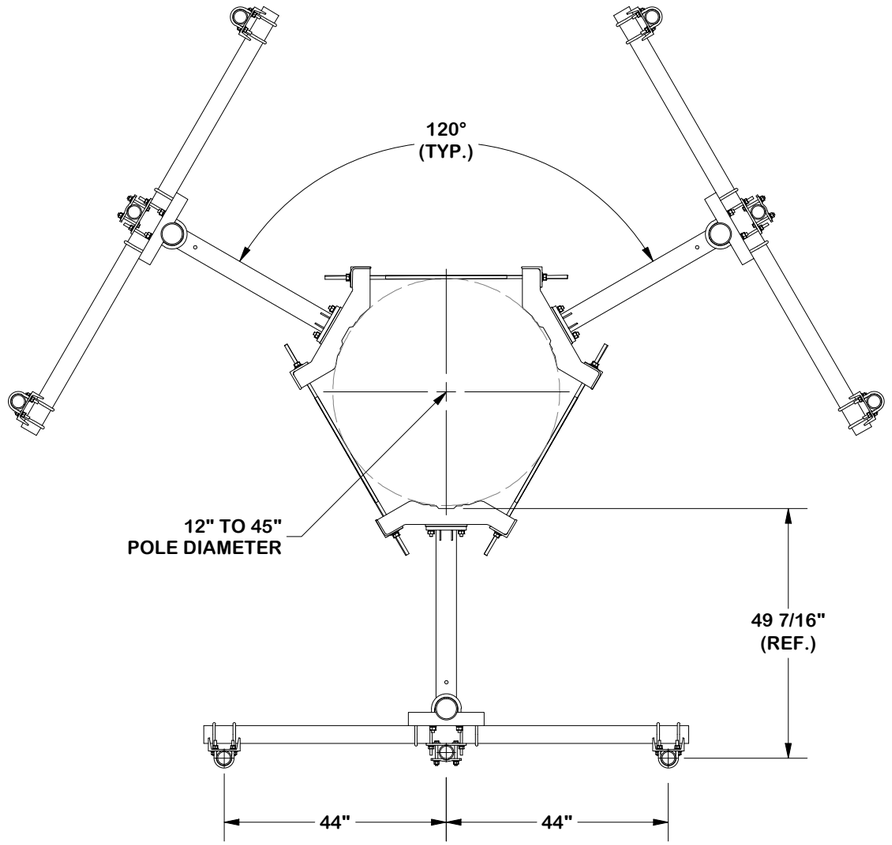

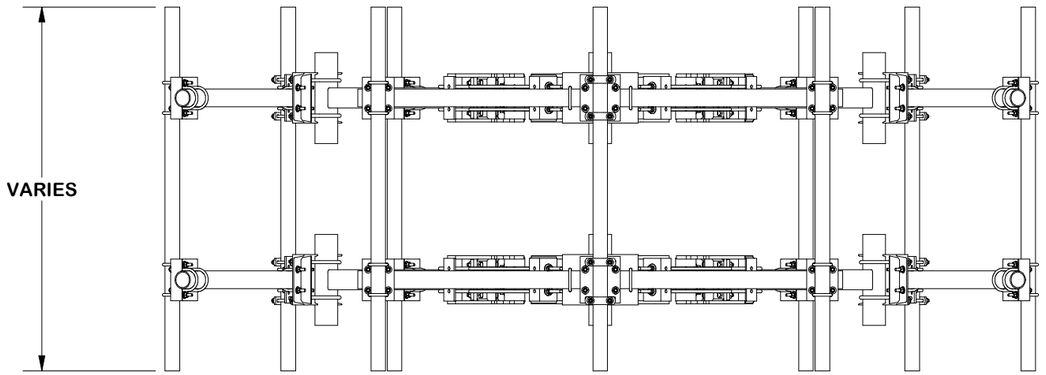

TOLERANCE NOTES

TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE:
SAWED, SHEARED AND GAS CUT EDGES *(± 0.030")*
DRILLED AND GAS CUT HOLES *(± 0.030")* - NO CONING OF HOLES
LASER CUT EDGES AND HOLES *(± 0.010")* - NO CONING OF HOLES
BENDS ARE ± 1/2 DEGREE
ALL OTHER MACHINING *(± 0.030")*
ALL OTHER ASSEMBLY *(± 0.060")*

PROPRIETARY NOTE:
THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.

DESCRIPTION
8' DOUBLE MONOPOLE
TRIPLE T-ARM 12"-45"
W/ 2-7/8" ANTENNA PIPES

SITE PRO 1
A valmont COMPANY
Engineering Support Team:
1-888-753-7446
Locations:
New York, NY
Atlanta, GA
Los Angeles, CA
Plymouth, IN
Salem, OR
Dallas, TX

CPD NO.	DRAWN BY	ENG. APPROVAL	PART NO.
NCS	CMFL 10/26/2020	4/10/2024	RMVD8-3-3XX

CLASS	SUB	DRAWING USAGE	CHECKED BY	DWG. NO.
87	02	CUSTOMER	CSL 4/10/2024	RMVD8-3-3XX